

Specialists in endoscope reprocessing
for more than 25 years!

WASSENBURG® DRY 300 endoscope drying cabinet



- + **Care for your endoscope**
Safe & controlled drying and conditioned storage for up to 10 flexible endoscopes.
- + **Always endoscopes ready for use**
Prevents recontamination and bacterial growth after washing & disinfection.
- + **Suitable for every logistic situation**
Available as pass through and non-pass through systems.
- + **Know where your endoscopes are**
One traceability system for both washing & disinfection and drying & conditioning.
- + **Pass through**
The DRY 300 series is also available as a pass through system.

OPTIMUM CONTROL

DIMENSIONS AND WEIGHT

Width x Depth x Height: 1300 x 450 x 2010 mm

Width with doors open (180°): 2000 mm

Width with doors open (90°): 960 mm

Weight when empty (approx.): 280 kg


AIR SUPPLY

Compressed air pressure: min. 2.0 bar, max. 8.0 bar

Compressed air quality: oil-free, filtered, non-condensing

ELECTRICAL CONNECTION

Voltage: 220 – 240 V (frequency 50Hz)

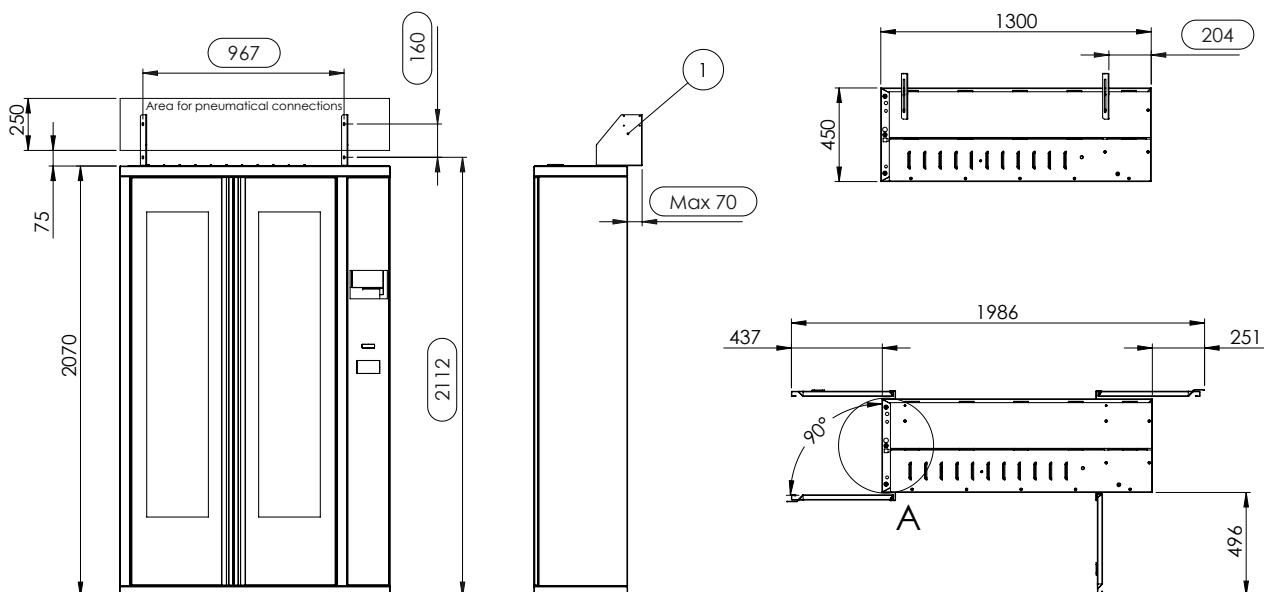

Please contact us for the full installation specifications of the WASSENBURG® Dry300 and Dry300D drying cabinets.
The WASSENBURG® Dry300 and Dry300D are CE-marked. © Copyright 2012. Subject to alterations.